

# SINGLE-CONDUCTOR CABLES INSULATED IN FEP + FEP, DOUBLE INSULATION, T180°C

**TP...**

2019



**Type of insulation:** FEP + FEP  
**Working temperature:** T 180°C  
**Type of conductor:** TIN-PLATED COPPER  
**Working voltage:** 450/750 V  
**In conformity to the standards:** CEI 20-51  
**In conformity to the requirements of the directives:** 2014/35/UE  
**Approval marks:** IMQ




Double insulated cable to be applied in class II fixtures.

• Sections table of the flexible conductor:

Code	Sections mm <sup>2</sup>	Conductor strand	External diameter ±0,2 mm
TP1C-	0,25 mm <sup>2</sup>	19 x 0,13	1,6
TP10-	0,50 mm <sup>2</sup>	19 x 0,18	1,9
TP17-	0,75 mm <sup>2</sup>	19 x 0,23	2,1
TP11-	1,00 mm <sup>2</sup>	19 x 0,26	2,3
TP15-	1,50 mm <sup>2</sup>	19 x 0,32	2,8

• Other sections on request.

• IMQ approval printing on the sheath.

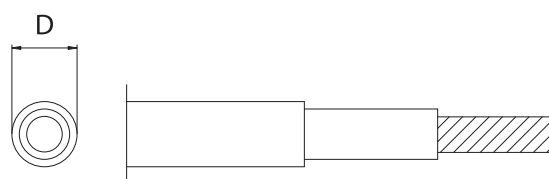

• Table of available colours:

- T = transparent
- B = white
- L = blue
- M = brown
- N = black
- Other colours on request.

*Note: this kind of cables may be supplied in spools, rolls or cut and processed according to customer's request (for cable workings and terminals see "Section 8").*

