MULTI-CONDUCTOR CABLES INSULATED IN FEP + FEP T180°C

TT--Z 2022

CE

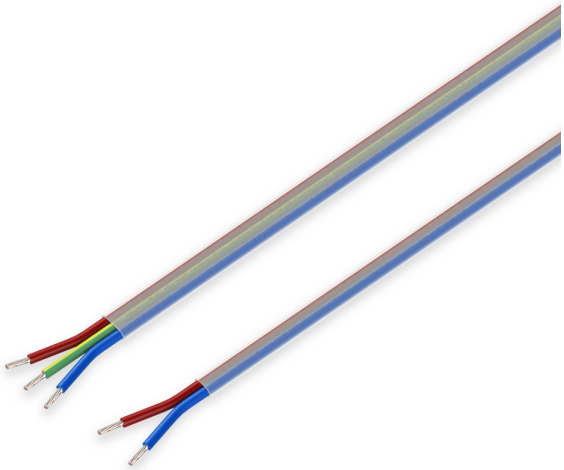

Type of insulation:	**FEP + FEP**
Working temperature:	**T 180°C**
Type of conductor:	**TIN-PLATED COPPER**
Working voltage:	**450/750 V**
In conformity to the requirements of the directives:	**2014/35/EU**
Approval marks, of the cores:	**IEMMEQU**

• Sections and multiple table of the cores:

Code	Sections mm²	Conductor strand	Cores colours*	Cores position	Shape	Dimension ±0,2 mm
TT29Z	2 x 0,35	7 x 0,25	l m	P	flat	3,0 x 1,7
TT20Z	2 x 0,50	19 x 0,18	l m	P	flat	3,3 x 1,9
TT23Z	2 x 20AWG	19 x 0,203	l m	P	flat	3,5 x 2,0
TT27Z	2 x 0,75	19 x 0,23	l m	P	flat	3,8 x 2,2
TT37Z	3 x 0,75	19 x 0,23	l m g	P	flat	5,8 x 2,5
TT21Z	2 x 1,00	19 x 0,26	l m	P	flat	4,2 x 2,3
TT25Z	2 x 1,50	19 x 0,32	l m	P	flat	5,0 x 2,7
TT35Z	3 x 1,50	19 x 0,32	l m g	P	flat	7,5 x 2,9
TT22Z	2 x 2,50	37 x 0,287	l m	P	flat	5,6 x 3,0

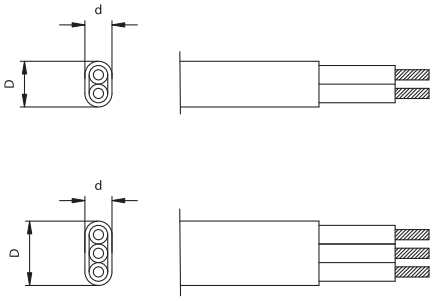

• Other sections and multiple on request.

* Table of the colours to identify the cores:
l = blue m = brown
g = yellow green

* Cores position table:
P = parallel

• IEMMEQU approval printing “FR5F” on the inner cores.

• Table of available colours:
T = transparent

E.M.C. Colosio has the right to make any modifications to the articles without forewarning. © All rights reserved. Edition January 2022