

MULTI-CONDUCTOR CABLES INSULATED IN FEP/FEP, DOUBLE INSULATION, + FEP T180°C

TU---

1997

CE

Type of insulation:	FEP / FEP + FEP
Working temperature:	T 180°C
Type of conductor:	TIN-PLATED COPPER
Working voltage:	300/500 V
In conformity to the requirements of the directives:	2014/35/EU
Approval marks, of the cores in double insulation:	VDE REG. Nr.



- Sections and multiple table of the cores:


Code	Sections mm ²	Conductor strand	Cores colours*	Cores position	Shape	Dimension ±0,2 mm
TU27-	2 x 0,75	19 x 0,23	t t	P	flat	2,6 x 4,5

- Other sections and multiple on request.

* Colours table of the cores:
t = transparent

Note: for the cables with coloured sheath, the polarization of the cores is given with two different colours (blue and brown).

* Cores position table:
P = parallel

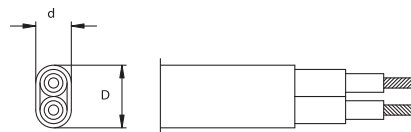

- VDE REG. Nr. approval printing on the cores in double insulation.

- Table of available colours:
T = transparent (sheath and cores)
N = black
B = white
 - Other colours on request.

