

BIPOLAR CABLES INSULATED IN TRANSPARENT FEP/FEP, DOUBLE INSULATION, + FEP/FEP T180°C

TW--T 2001

CE

Type of insulation: FEP / FEP + FEP / FEP
Working temperature: T 180°C
Type of conductor: TIN-PLATED COPPER
Working voltage: 300/500 V
In conformity to the requirements of the directives: 2014/35/EU
Approval marks, of the core in double insulation: VDE REG. Nr.




- Transparent sheath.

- Sections and multiple table of the cores:

Code	Sections mm ²	Conductor internal strand	Conductor external strand	Dimension ±0,2 mm
TW27T	2 x 0,75	19 x 0,23	112x0,10	3,8

- Other sections on request.

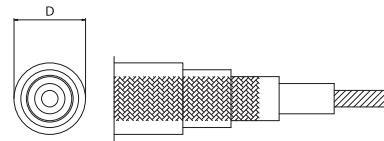

- VDE REG. Nr. approval printing on the cores in double insulation.

- Table of available colours:
T = transparent
 - Other colours on request.

