

SINGLE-CONDUCTOR CABLES INSULATED IN PTFE T250°C UR + CSA

U0---



Type of insulation: PTFE
Working temperature: T 250°C
Type of conductor: NICKEL-PLATED or SILVER-PLATED COPPER
Working voltage: 300 V
In conformity to the standards: UL 758 AWM STYLE 1815
 CSA C22.2 n. 210.5
Approval marks: UR
 CSA




PROCESSED WIRE FILE E221012

RESPOOLED WIRE FILE E221012

• AWG table of the flexible conductor:

Code	AWG	Conductor strand	External diameter ±0,2 mm
U013-	20 AWG	7 x 0,32	1,7
U018-	18 AWG	19 x 0,254	1,9

• Other AWG on request.

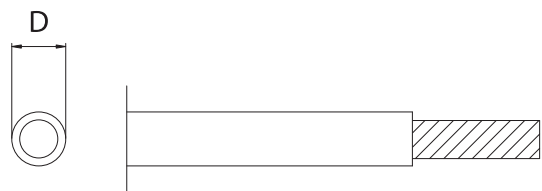

- Table of available colours:
T = transparent
B = white
N = black
G = yellow/green (ground cable)
 - Other colours on request.

• cURus approval printing on the sheath.

Note: this kind of cables may be supplied in spools, rolls or cut and processed according to customer's request (for cable workings and terminals see "Section 8").

