

SINGLE-CONDUCTOR CABLES INSULATED IN FEP + FEP, DOUBLE INSULATION, T180°C EXTRAFLEXIBLE

VDI--

1998



Type of insulation: FEP + FEP
Working temperature: T 180°C
Type of conductor: TIN-PLATED COPPER
Working voltage: 300/300 V
In conformity to the requirements of the directives: 2014/35/EU
Approval marks:




Double insulated cable to be applied in class II fixtures.

- Extraflexible strands.

- Sections table of the flexible conductor:

Code	Sections mm ²	Conductor strand	External diameter ±0,2 mm
VDI7-	0,75 mm ²	385 x 0,05	2,3
VDI5-	1,50 mm ²	735 x 0,05	2,9

- Other sections on request.

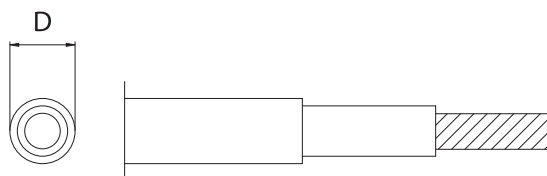

- Table of available colours:
T = transparent + transparent
 - Other colours on request.

Note: this kind of cables may be supplied in spools, rolls or cut and processed according to customer's request (for cable workings and terminals see "Section 8").

