

# MULTI-CONDUCTOR CABLES INSULATED IN PVC + PVC, T105°C cULus

**WE--**



Type of insulation: **PVC + PVC SJT**

Working temperature: **T 105°C**

Type of conductor: **RED COPPER**

Working voltage: **300 V**

In conformity to the standards: **UL 62/1581 CSA 22.2**

Approval marks: **cULus Listed**



PROCESSED WIRE FILE E221012

RESPOOLED WIRE FILE E221012

• AWG and multiple table of the cores:


Code	AWG	Conductor strand	Cores colours*	Shape	Dimension ±0,2 mm
<b>WE28-</b>	2 x 18	28 x 0,193	n b	round	ø 7,8
<b>WE38-</b>	3 x 18	28 x 0,193	n b v	round	ø 8,2
<b>WE48-</b>	4 x 18	28 x 0,193	n b r v	round	ø 8,9
<b>WEQ8-</b>	4 x 18	28 x 0,193	n b r m	round	ø 8,9
<b>WE58-</b>	5 x 18	28 x 0,193	n b r m v	round	ø 9,8
<b>WE2L-</b>	2 x 16	28 x 0,245	n b	round	ø 8,2
<b>WE3L-</b>	3 x 16	28 x 0,245	n b v	round	ø 9,0
<b>WE25-</b>	2 x 14	44 x 0,245	n b	round	ø 9,2
<b>WE35-</b>	3 x 14	44 x 0,245	n b v	round	ø 9,7

• Other AWG on request.

\* Colours table of the cores:

n = black                      b = white                      v = green  
r = red                          m = brown

• cULus approval printing engraved, without ink, on the sheath.

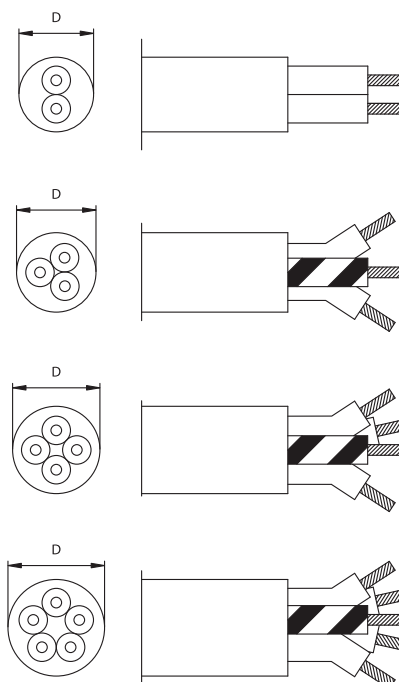

• Table of available colours:

**N** = black  
**B** = white  
- Other colours on request.

