

MULTI-CONDUCTOR CABLES INSULATED IN PVC + PVC T105°C cURus

WL---

cURus

Type of insulation: **PVC + PVC
STYLE 2517**

Working temperature: **T 105°C**

Type of conductor: **TIN PLATED COPPER**

Working voltage: **300 V**

In conformity to the standards: **UL 758 AWM STYLE 2517**

Approval marks: **cURus**

PROCESSED WIRE  FILE E221012

RESPOOLED WIRE  FILE E221012

- AWG and multiple table of the cores:



Code	AWG	Conductor strand	Cores colours*	Shape	Dimension ±0,2 mm
WL2C-	2 x 24	7 x 0,193	r n	round	∅ 4,4
WL29-	2 x 22	12 x 0,193	r n	round	∅ 5,1
WL23-	2 x 20	19 x 0,193	r n	round	∅ 5,5
WL28-	2 x 18	28 x 0,193	r n	round	∅ 5,9
WLPC-	2 x 24	7 x 0,193	r n	flat	3,0 x 4,4
WLP9-	2 x 22	12 x 0,193	r n	flat	3,3 x 5,1
WLP3-	2 x 20	19 x 0,193	r n	flat	3,5 x 5,6
WLP8-	2 x 18	28 x 0,193	r n	flat	3,7 x 5,8
WLQC-	4 x 24	7 x 0,193	r n b l	round	∅ 5,0
WLQ9-	4 x 22	12 x 0,193	r n b l	round	∅ 5,8
WLQ3-	4 x 20	19 x 0,193	r n b l	round	∅ 6,4
WLQ8-	4 x 18	28 x 0,193	r n b l	round	∅ 6,8
WLSC-	6 x 24	7 x 0,193	r n m l e p	round	∅ 5,8
WLS9-	6 x 22	12 x 0,193	r n m l e p	round	∅ 6,7
WLS3-	6 x 20	19 x 0,193	r n m l e p	round	∅ 7,5
WLS8-	6 x 18	28 x 0,193	r n m l e p	round	∅ 8,0

- Other AWG on request.

* Colours table of the cores:

n = black m = brown r = red
l = blue e = grey p = purple
b = white

- cURus approval printing engraved, without ink, on the sheath.

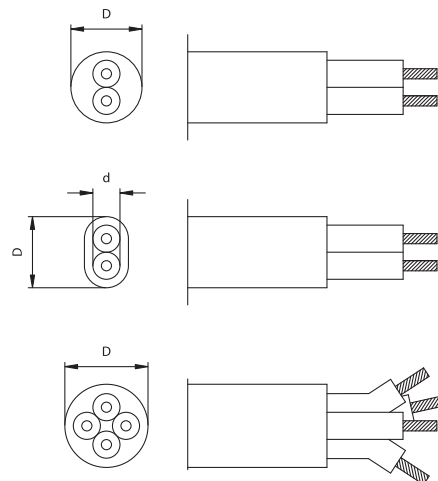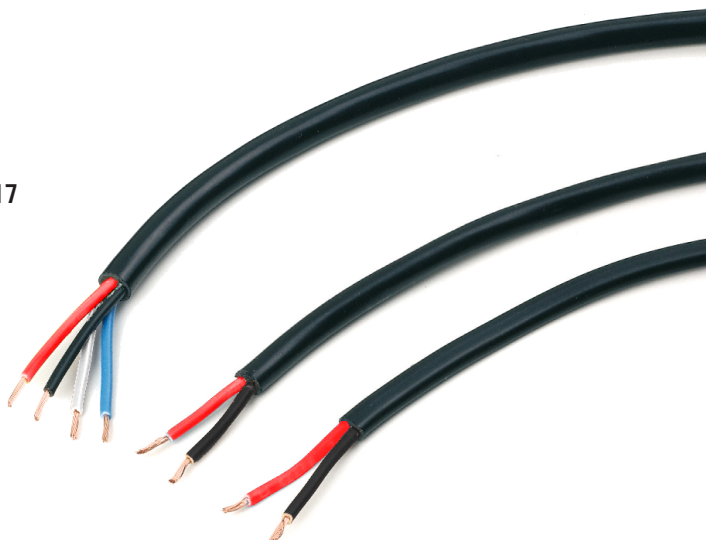

- Table of available colours:

N = black
B = white
E = grey
- Other colours on request.