

MULTI-CONDUCTOR CABLES INSULATED IN PVC + PVC T80°C cURus

WP---



Type of insulation:

**PVC + PVC
STYLE 2464
T 80°C**

Working temperature:

Type of conductor:

**TIN PLATED COPPER
300 V**


Working voltage:

In conformity to the standards:

UL 758 AWM STYLE 2464

Approval marks:

cURus

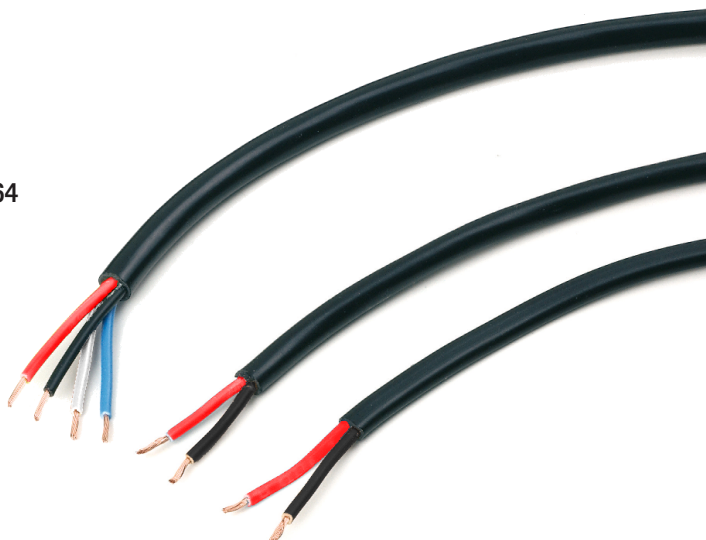


PROCESSED WIRE  FILE E221012

RESPOOLED WIRE  FILE E221012

• AWG and multiple table of the cores:

Code	AWG	Conductor strand	Cores colours*	Shape	Dimension ±0,2 mm
WP2C-	2 x 24	7 x 0,193	r n	round	∅ 4,4
WP29-	2 x 22	12 x 0,193	r n	round	∅ 5,1
WP23-	2 x 20	19 x 0,193	r n	round	∅ 5,5
WP28-	2 x 18	28 x 0,193	r n	round	∅ 5,9
WPPC-	2 x 24	7 x 0,193	r n	flat	3,0 x 4,4
WPP9-	2 x 22	12 x 0,193	r n	flat	3,3 x 5,1
WPP3-	2 x 20	19 x 0,193	r n	flat	3,5 x 5,6
WPP8-	2 x 18	28 x 0,193	r n	flat	3,7 x 5,8
WPQC-	4 x 24	7 x 0,193	r n b l	round	∅ 5,0
WPQ9-	4 x 22	12 x 0,193	r n b l	round	∅ 5,8
WPQ3-	4 x 20	19 x 0,193	r n b l	round	∅ 6,4
WPQ8-	4 x 18	28 x 0,193	r n b l	round	∅ 6,8

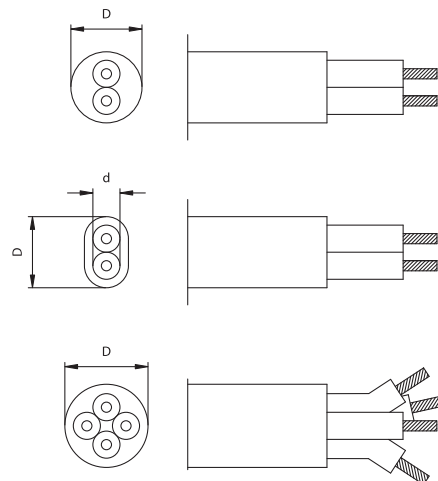

• Other AWG on request.

* Colours table of the cores:

n = black

b = white

r = red

l = blue

• Table of available colours:

N = black

B = white

E = grey

- Other colours on request.

• cURus approval printing engraved, without ink, on the sheath.

