


MULTI-CONDUCTOR CABLES IN PVC + PVC TRANSPARENT/CLEAR cULus

WV--T



Type of insulation: PVC + PVC SVT
Working temperature: T 105°C
Type of conductor: RED COPPER
Working voltage: 300 V
In conformity to the standards: UL 62/1581 CSA 22.2
Approval marks: cULus Listed

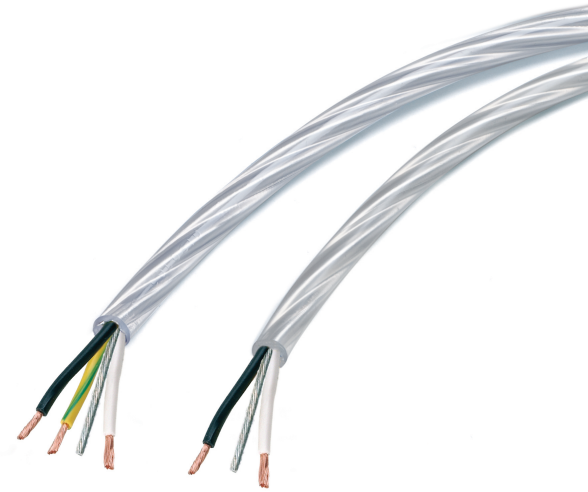

PROCESSED WIRE FILE E221012

RESPOOLED WIRE FILE E221012

- AWG and multiple table of the cores:

Code	AWG	Conductor strand	Cores colours*	Shape	Dimension ±0,2 mm
WV28T	2 x 18	48 x 0,15	n b	round	∅ 6,4
WV38T	3 x 18	48 x 0,15	n b v	round	∅ 6,6


- Other AWG on request.

* Colours table of the cores:

n = black

b = white

v = green

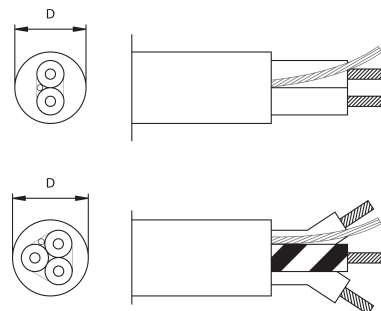

- cULus approval printing engraved, without ink, on the sheath.

- Table of available colours:
T = transparent / clear
(with Aluminum/Silver tape between cores and sheath)