

SINGLE-CONDUCTOR CABLES INSULATED IN FEP 600V T200°C UR

X0---



Type of insulation: FEP
Working temperature: T 200°C
Type of conductor: NICKEL-PLATED COPPER
Working voltage: 600 V
In conformity to the standards: UL 758 AWM STYLE 1330
Approval marks: cURus




PROCESSED WIRE FILE E221012

RESPOOLED WIRE FILE E221012

- AWG table of the flexible conductor:

Code	AWG	Conductor strand	External diameter ±0,2 mm
X018-	18 AWG	37 x 0,182	2,3

- Other AWG on request.

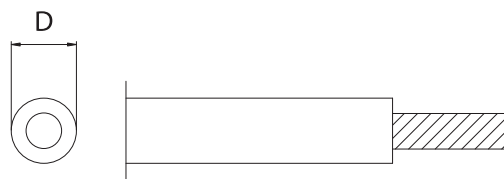

- Table of available colours:

T = transparent*

B = white

N = black

- Other colours on request.

* Note: in the cables with transparent insulation, if necessary, the cables polarization is given with the white and black printing.

Note: this kind of cables may be supplied in spools, rolls or cut and processed according to customer's request (for cable workings and terminals see "Section 8").

- cURus approval printing on the sheath.

