

SINGLE-CONDUCTOR CABLES INSULATED IN PTFE T250°C

F0---

CE

Type of insulation:	PTFE
Working temperature:	T 250°C
Type of conductor:	NICKEL-PLATED COPPER
Working voltage:	300/500 V
In conformity to the standards:	DIN VDE 0250
In conformity to the requirements of the directives:	2014/35/EU
Approval marks:	VDE REG. Nr.



- Sections table of the flexible conductor:

Code	Sections mm ²	Conductor strand	External diameter ±0,2 mm
F010-	0,50 mm ²	19 x 0,18	1,5
F017-	0,75 mm ²	19 x 0,23	1,6
F011-	1,00 mm ²	32 x 0,20	1,8
F015-	1,50 mm ²	30 x 0,25	2,2


- Other sections on request.

- Sections table of the solid conductor:

Code	Sections mm ²	Conductor strand	External diameter ±0,2 mm
FOR7-	10/10 (0,75 mm ²)	1 x 0,98	1,6

- Other sections on request.

- VDE REG. Nr. approval printing on the sheath.

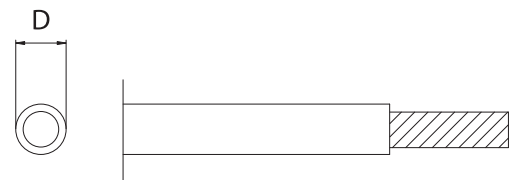

- Table of available colours:

T = transparent

B = white

L = blue

M = brown

N = black

R = red

G = yellow/green (ground cable)

- Other colours on request.

Note: this kind of cables may be supplied in spools, rolls or cut and processed according to customer's request (for cable workings and terminals see "Section 8").