

# SWITCHES

## M88-



Switch:

Rated voltage:

Rated current:

Insulation class:

Type of clamps for

cables connection:

Clamps connecting capacity:

Protection degree:

In conformity to the standards:

In conformity to the requirements  
of the directives:

Approval marks:

**“FOOT” SWITCH**

**250 V**

**2 (1) A**

**I or II**

**SCREW CLAMPS**

**0,75 mm<sup>2</sup>**

**IP40**

**EN 50075-1**

**2014/35/EU**

**IMQ**





- Table of the cables connectable to the switch:

Transparent switch version:

Insulation	Shape	Sections	Temperature	Type	cod./page
PVC + PVC TRANSPARENT	flat	2 x 0,75 mm <sup>2</sup>	T70°C	FRDR	RSP7T (page 9057)
PVC + PVC TRANSPARENT	flat	2 x 0,75 mm <sup>2</sup>	T70°C	FRDR	RBP7T (page 9056)
PVC + PVC TRANSPARENT	round	2 x 0,75 mm <sup>2</sup>	T70°C	FROR	RS27T (page 9057)
PVC + PVC TRANSPARENT	round	3 x 0,75 mm <sup>2</sup>	T70°C	FROR	RS37T (page 9057)
FEP + PVC TRANSPARENT	flat	2 x 0,75 mm <sup>2</sup>	T70°C (T180°C cores)	FR5FDR	BSP7T (page 9063)
FEP + PVC TRANSPARENT	round	2 x 0,75 mm <sup>2</sup>	T70°C (T180°C cores)	FR5FOR	BS27T (page 9063)
FEP + PVC TRANSPARENT	round	3 x 0,75 mm <sup>2</sup>	T70°C (T180°C cores)	FR5FOR	BS37T (page 9063)

Coloured switch version:

Insulation	Shape	Sections	Temperature	Type	cod./page
PVC + PVC N - B - O	flat	2 x 0,75 mm <sup>2</sup>	T70°C	H03WH2-F	RRP7- (page 9053)
PVC + PVC N - B - O	round	2 x 0,75 mm <sup>2</sup>	T70°C	H03W-F	RR27- (page 9053)
PVC + PVC N - B - O	flat	2 x 0,75 mm <sup>2</sup>	T90°C	H03V2/2H2-F	RHP7- (page 9052)
PVC + PVC N - B - O	round	2 x 0,75 mm <sup>2</sup>	T90°C	H03V2/2-F	RH27- (page 9052)
PVC + PVC N - B - O	round	3 x 0,75 mm <sup>2</sup>	T70°C	H03W-F	RR37- (page 9053)
PVC + PVC N - B - O	round	3 x 0,75 mm <sup>2</sup>	T90°C	H03V2/2-F	RH37- (page 9052)

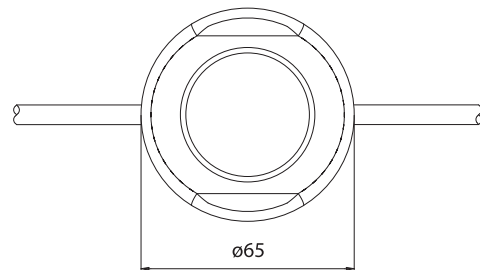

*Note: on customer's request, it is possible to supply the switch connected with plugs and cables.*

- Polycarbonate body, for the transparent version, PA66 body for the coloured versions.  
Raw or nickel-plated phosphorous bronze or brass contacts.  
Brass clamps with slot screws.  
PA66 cable-clamp.

- Table of the available colours:

**T** = transparent

**B** = white

**N** = black

**O** = gold

- Other colours on request.

