

MULTI-CONDUCTOR CABLES, FLAT AND SEPARABLE, INSULATED IN PVC

RA--T

CE

Type of insulation: **PVC (SEPARABLE)**

Working temperature: **T 90°C**

Type of conductor: **TIN PLATED COPPER**
Working voltage: **300/300 V**

In conformity to the standards: **EN 50525-2-31: 2011**
(as far as applicable)

In conformity to the requirements of the directives: **2014/35/EU**


Approval marks:



- Cores separable

- Sections and multiple table of the cores:

Code	Sections mm ²	Conductor strand	Shape	Dimension ±0,2 mm
RA29T	2 x 0,35	12 x 0,193	flat	3,6 x 1,8
RA20T	2 x 0,50	16 x 0,193	flat	5,4 x 2,7
RA27T	2 x 0,75	24 x 0,193	flat	5,6 x 2,9

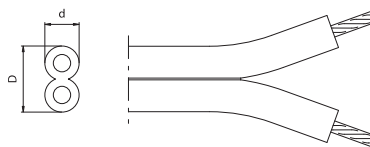

- Other sections and formations on request.

- Table of available colours:

T = transparent

- Other colours on request.



MULTI-CONDUCTOR CABLES, FLAT AND SEPARABLE, INSULATED IN PVC

RA---

CE

Type of insulation: PVC (SEPARABLE)


Working temperature: T 90°C

Type of conductor: RED COPPER
Working voltage: 300/300 V

In conformity to the standards: EN 50525-2-31: 2011
(as far as applicable)

In conformity to the requirements of the directives: 2014/35/EU


Approval marks:

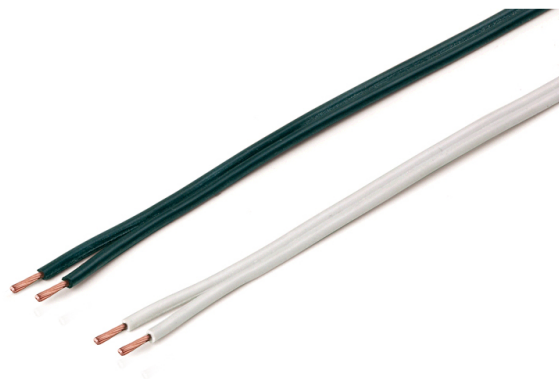

- Cores separable

- Sections and multiple table of the cores:

Code	Sections mm ²	Conductor strand	Shape	Dimension ±0,2 mm
RA29-	2 x 0,35	12 x 0,193	flat	3,6 x 1,8
RA20-	2 x 0,50	16 x 0,193	flat	5,4 x 2,7
RA27-	2 x 0,75	24 x 0,193	flat	5,6 x 2,9

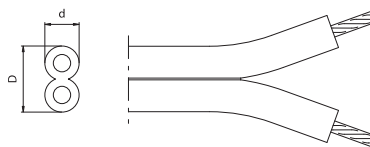

- Other sections and formations on request.

- Table of available colours:

B = white

N = black

- Other colours on request.