

MULTI-CONDUCTOR CABLES INSULATED IN PVC + PVC WITH COLOURED FABRIC

RR--X--

CE

Type of insulation: **PVC + PVC+ COLOURED FABRIC**


Working temperature: **T 70°C (T70° the fabric braid)**

Type of conductor: **RED COPPER**
 Working voltage: **300/300 V**
 Cable nomenclature: **H03VV-F(*)**
 In conformity to the standards: **EN50525-2-11:2011 (*)**

In conformity to the requirements of the directives: **2014/35/EU**

Approval marks: **IEMMEQU - <HAR> (*)**

(*) For the inner cable

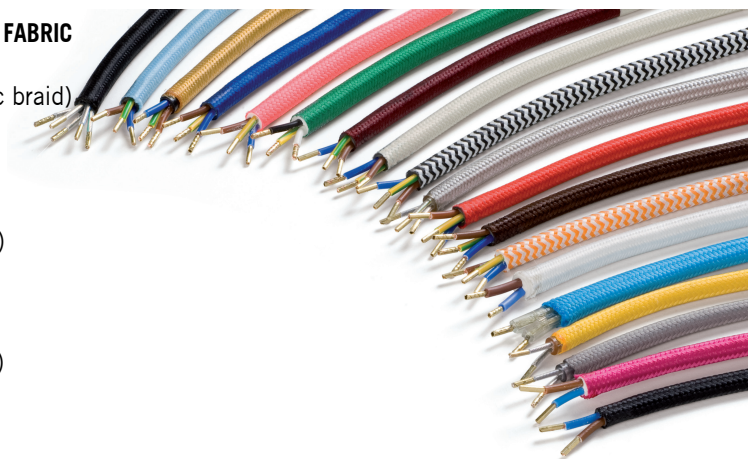

RR--X--: CABLE WITH BRAID IN COLOURED FABRIC (Available in a wide variety of colours)

- Sections and multiple table of the cores:

Code	Sections mm ²	Conductor strand	Cores colours*	Shape	Dimension ±0,2 mm
RR27X--	2 x 0,75	24 x 0,193	l m	round	ø 5,8
RR37X--	3 x 0,75	24 x 0,193	l m g	round	ø 6,3
RR47X--	4 x 0,75	24 x 0,193	l m n g	round	ø 6,8

- Other sections on request.

* Colours table of the cores:

l = blue m = brown g = yellow/green
 n = black

- IEMMEQU - <HAR> approval printing or the sheath of the inner cable.

