


MULTI-CONDUCTOR CABLES INSULATED IN PVC + PVC SJT-B WITH COLOURED FABRIC

WE--X--



Type of insulation: **PVC + PVC SJT-B + COLOURED FABRIC**
 Working temperature: **T 105°C**
 Type of conductor: **RED COPPER**
 Working voltage: **300 V**
 In conformity to the standards: **UL 62/1581 CSA22.2**
 Approval marks: **cULus Listed**

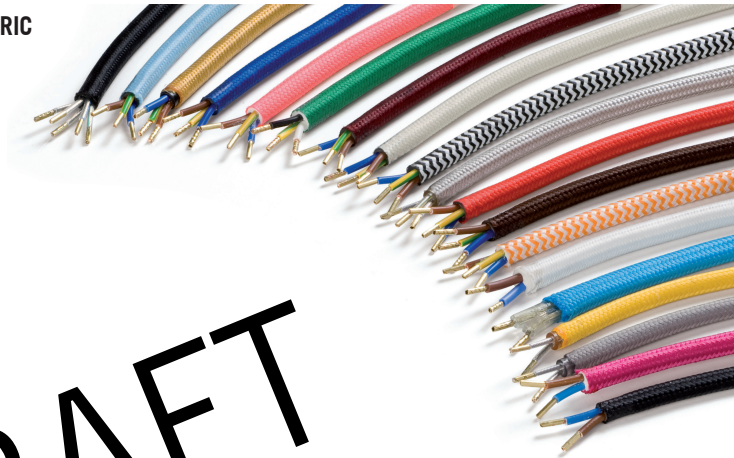

DRAFT

PROCESSED WIRE FILE E221012

RESPOOLED WIRE FILE E221012

WE--X--: Cable with Braid in Coloured fabric
(Available in a wide variety of colours)


- AWG and multiple table of the cores:

Code	AWG	Conductor strand	Cores colours*	Shape	Dimension ±0,2 mm
WE28X--	2 x 18	28 x 0,193	n b	round	∅ 8,3
WE38X--	3 x 18	28 x 0,193	n b v	round	∅ 8,8
WE48X--	4 x 18	28 x 0,193	n b r v	round	∅ 9,4
WEQ8X--	4 x 18	28 x 0,193	n b r m	round	∅ 9,4
WE58X--	5 x 18	28 x 0,193	n b r m v	round	∅ 10,3
WE68X--	6 x 18	28 x 0,193	n b r v l e	round	∅ 11,3
WE2LX--	2 x 16	28 x 0,245	n b	round	∅ 8,7
WE3LX--	3 x 16	28 x 0,245	n b v	round	∅ 9,5
WE25X--	2 x 14	44 x 0,245	n b	round	∅ 9,7
WE35X--	3 x 14	44 x 0,245	n b v	round	∅ 10,3

- Other AWG on request.

* Colours table of the cores:

n = black b = white v = green
 r = red m = brown l = blue
 e = grey

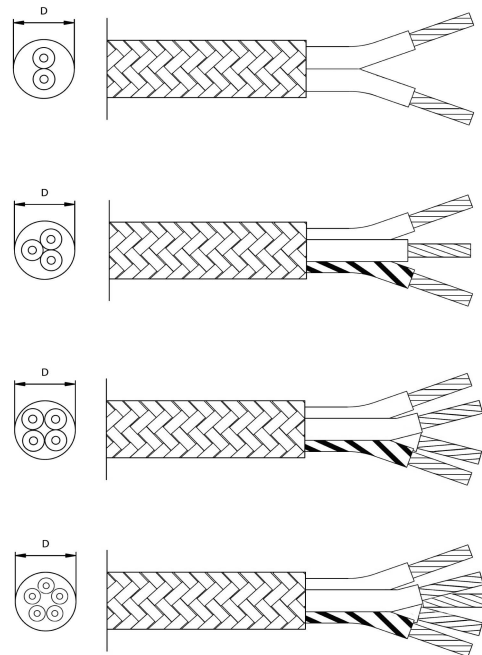

- cULus cable marking present on a tape placed longitudinally under the braid.

